


Razor 75x92 Up/down

Linear Extrusion System for Commercial Application

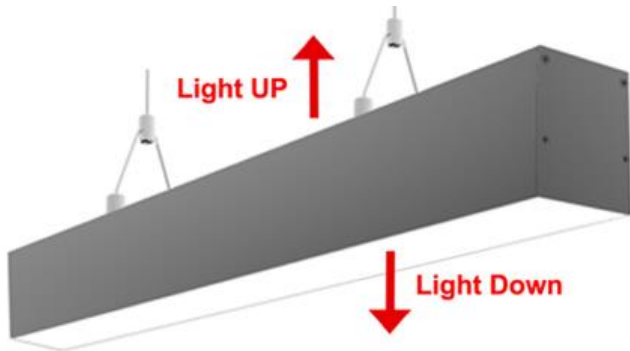

- Linear Extrusion System for commercial application available for downlight only or up/down application
- OSRAM Linear solution integrated for up to 180lm/W board
- Suspended & Surface Mount Option
- Customized length's possible.
- Homogeneous light distribution.
- Long system life time with 5 years system warranty*.

OSRAM

| Technical Specification | | | |
|-------------------------|--|----------|---------|
| System Power (Down) | 30W/m | | |
| Luminaire Output | 2380lm/m | | |
| System Power (Up) | 20W/m | 14.4W/m | 9.6W/m |
| Luminaire Output (Up) | 2000lm/m | 1200lm/m | 800lm/m |
| Colour Temperature | 3000K / 4000K / 6500K | | |
| CRI Option | >80 & >90 | | |
| MacAdam | 3 | | |
| Lifetime | 50,000 hrs | | |
| Dimming Option | DALI & TouchDim | | |
| Dimension | W 75mm, H 92mm | | |
| Installation | Suspended / Surface Mount (Down light only) | | |
| Finish Colour | Black, White & Natural Anodised Can be powdercoated any colour (extra cost subjected) | | |

