FLEXI LEXI

0812S

Neon LED Strip for Commercial Retail & Residential Application

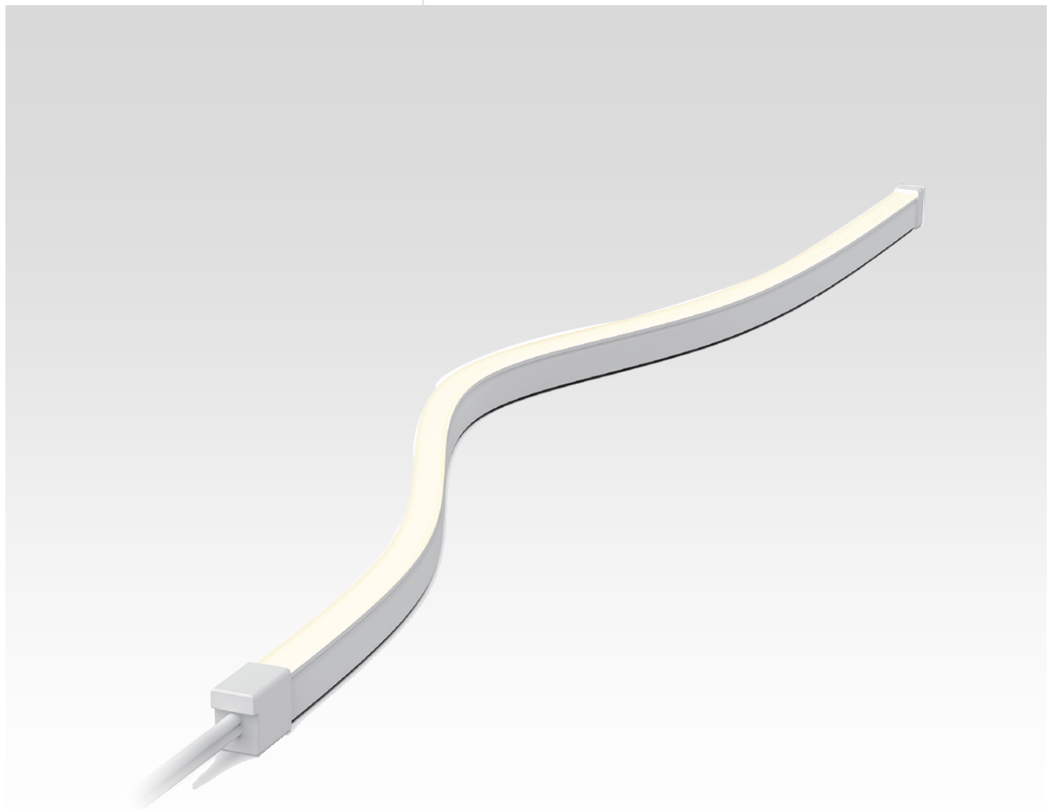

Flexi Lexi series bendable in horizontal and vertical direction. Small cutting increment of 50mm. Maximum 10 meter run for single feed. UV prove and Salt-mist prove suitable to use in outdoor or seaside. Mounting Clip and profile and stainless-steel chain available for installation

IP65/67 IK10 Flicker Free DALI 2 RGB

LUMINAIRE SPECIFICATION

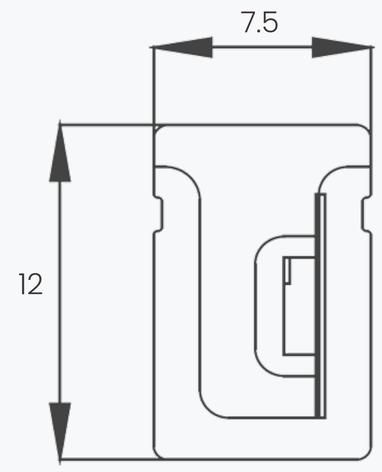

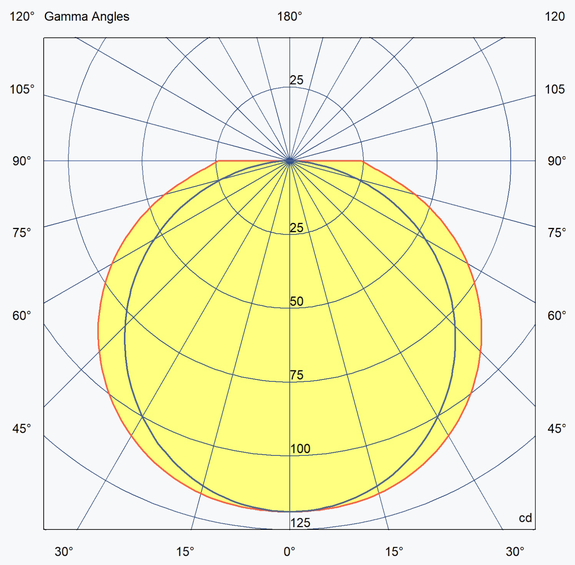

12 W/m 3000 K

Light Source Data

System Power (W/m)	12
Delivered Lumen (lm/m)	399 @ 3000 K
Efficacy (lm/W)	32 @ 3000 K
CCT (K)	2700 / 3000 / 4000 / 6500 / RGB
Beam Angle	115 °
CRI	90
SDCM	<3

General Data

Mounting	Clip / Profile Mounted
Dimension (mm)	7.5 (W) x 12 (H) x 10000 (Max L)
Bending Radius (mm)	Min. 30
Finish	White
IP Rating	IP65 / 67
Lifetime (L80B10)	50,000hrs
Dimming Control	Phase cut / 0-10V / DALI / Casambi
Warranty	5 years