# RAZOR
# 20 WW

## Extrusion for Commercial
## Retail & Residential Application

Razor series offer high-efficiency illumination with a sleek design available in white or black finishes. It features superior lighting performance and versatile mounting options, with dimming controls and a long lifespan ensuring reliable and customizable lighting solutions.

IP20 · Flicker Free · DALI 2

## LUMINAIRE SPECIFICATION

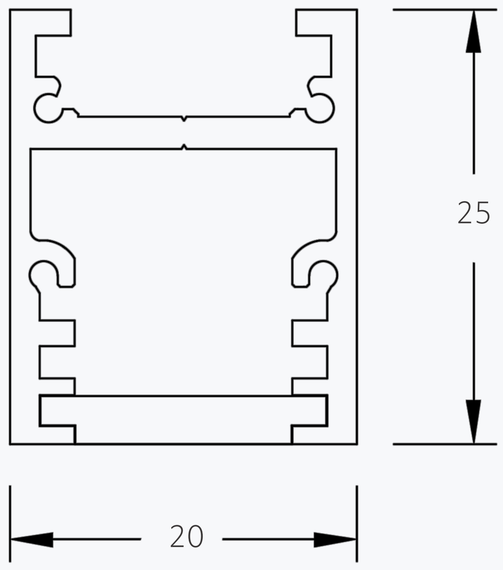


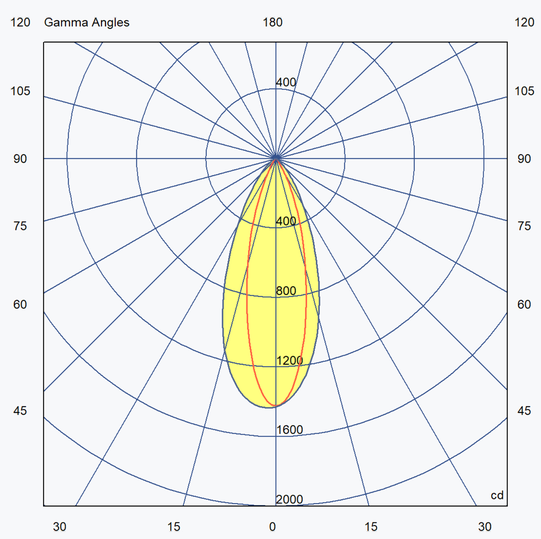


25.4 W/m 4000 K CRI80

### Light Source Data

| | |
|---|---|
| System Power (W/m) | 25.4 @ 4000 K |
| Delivered Lumen (lm/m) | 1694 @ 4000 K |
| Efficacy (lm/W) | 66.7 @ 4000 K |
| CCT (K) | 2700 / 3000 / 3500 / 4000 / 5000 |
| Beam Angle | 27 ° x 43 ° |
| CRI | 80/90 |
| SDCM | <3 |

### General Data

| | |
|---|---|
| Mounting | Surface Mounted / Suspended |
| Dimension (mm) | 20 (W) x 25 (H) |
| Finish | White / Black |
| IP Rating | 20 |
| Lifetime (L80B10) | 50,000hrs |
| Dimming Control | Phase cut / 0-10V / DALI / Casambi |
| Warranty | 5 years |