RAZOR
37-H

Extrusion for Commercial
Retail & Residential Application

Razor series offer high-efficiency illumination with a sleek design available in white or black finishes. It features superior lighting performance and versatile mounting options, with dimming controls and a long lifespan ensuring reliable and customizable lighting solutions.

IP20 IK10 Flicker Free DALI 2

LUMINAIRE SPECIFICATION

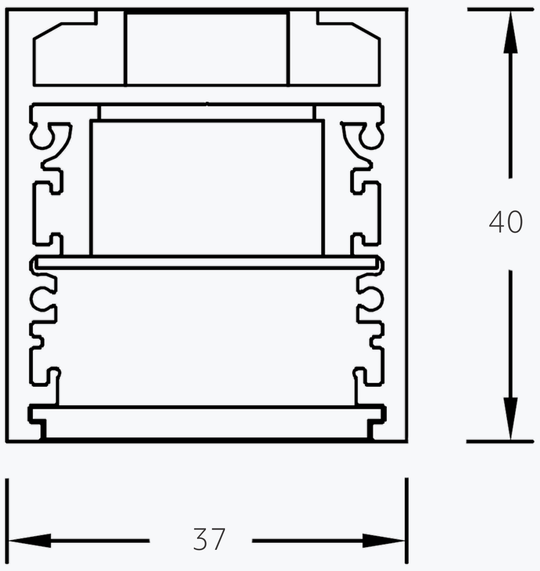

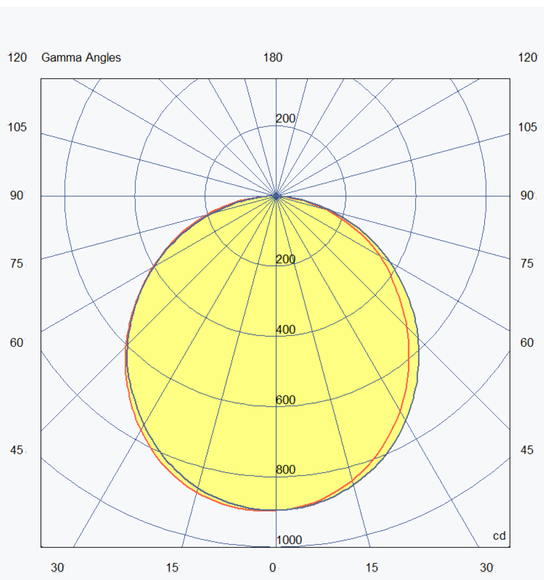

18.2 W/m 4000 K CRI80

Light Source Data

System Power (W/m)	18.2 @ 4000 K
Delivered Lumen (lm/m)	2220 @ 4000 K
Efficacy (lm/W)	122 @ 4000 K
CCT (K)	2700 / 3000 / 3500 / 4000 / 5000
Beam Angle	110 °
CRI	80/90
SDCM	<3

General Data

Mounting	Surface Mounted / Suspended
Dimension (mm)	37 (W) x 40 (H)
Finish	White / Black
IP Rating	20
IK Rating	IK10
Lifetime (L80B10)	50,000hrs
Dimming Control	Phase cut / 0-10V / DALI / Casambi
Warranty	5 years