


# RAZOR 50R-LG

Extrusion for Commercial  
Retail & Residential Application

Razor series offer high-efficiency illumination with a sleek design available in white or black finishes. It features superior lighting performance and versatile mounting options, with dimming controls and a long lifespan ensuring reliable and customizable lighting solutions.

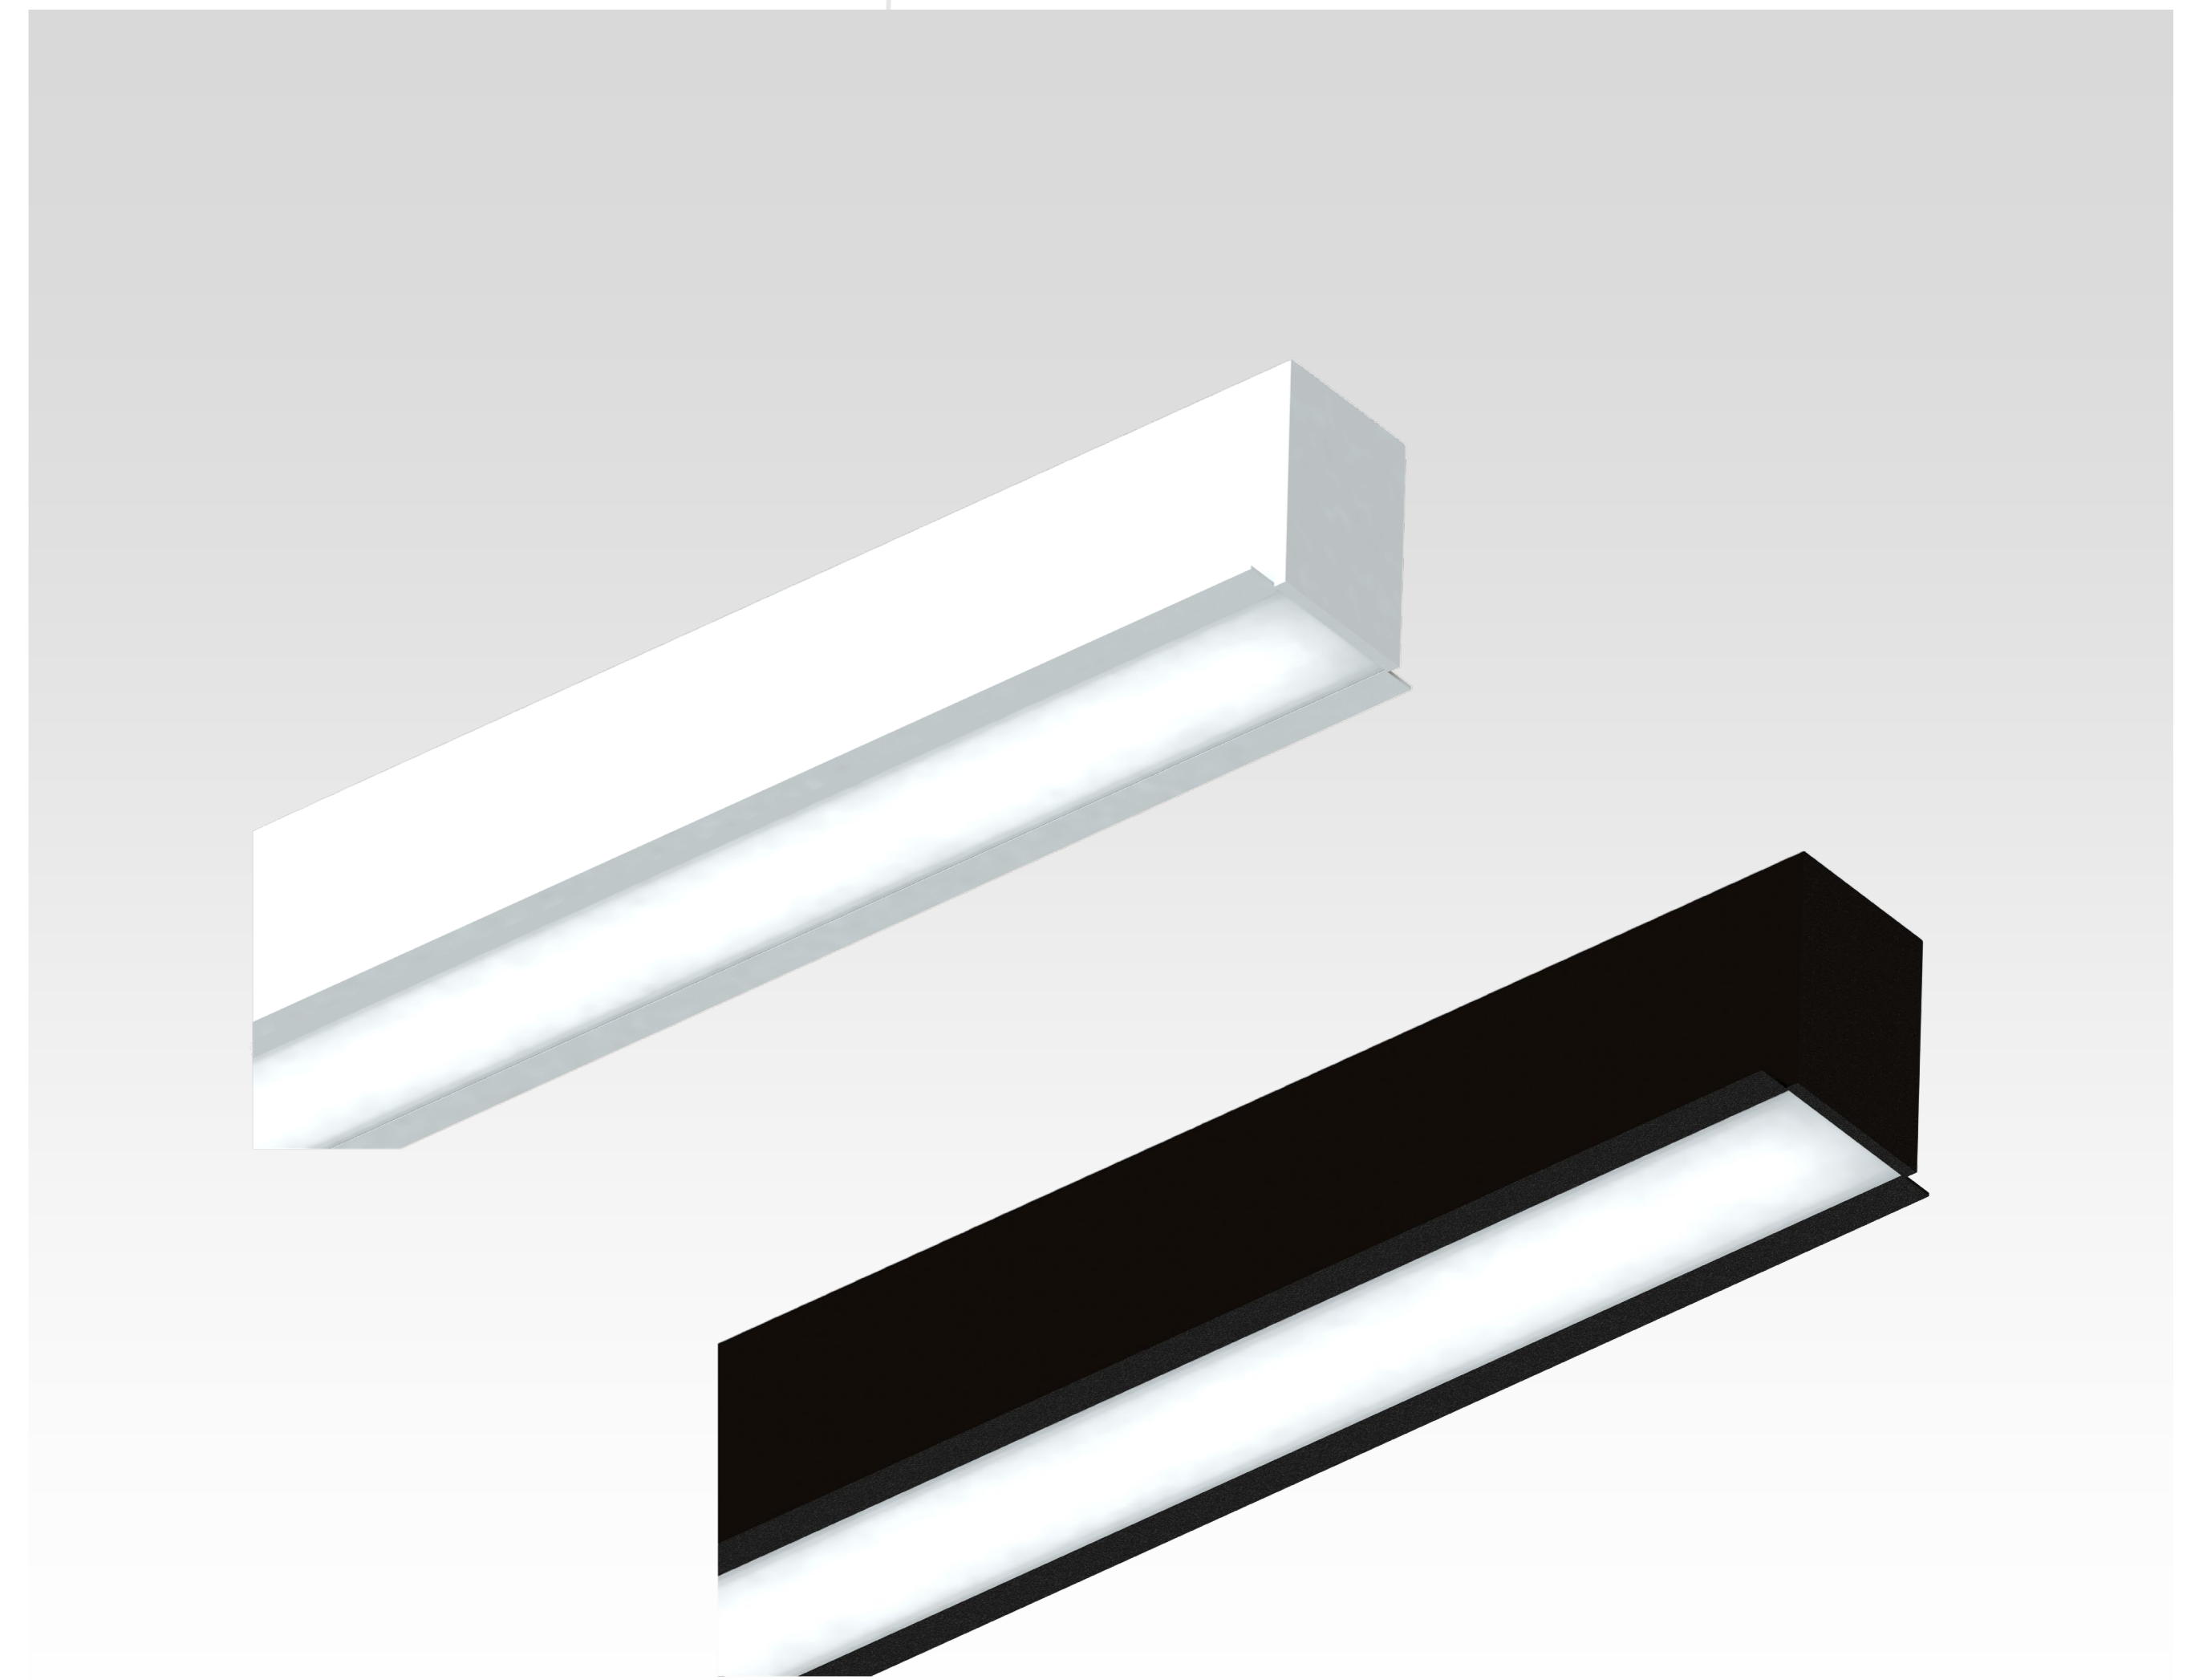



## LUMINAIRE SPECIFICATION

### Light Source Data

System Power (W/m)	24 @ 4000 K
Delivered Lumen (lm/m)	2427 @ 4000 K
Efficacy (lm/W)	99.9 @ 4000 K
CCT (K)	2700 / 3000 / 3500 / 4000 / 5000
Beam Angle	100 °
CRI	80 / 90
SDCM	<3

### General Data

Mounting	Recessed
Dimension (mm)	66 (W) x 70 (H)
Cutout (mm)	50
Finish	White / Black
IP Rating	20
Lifetime (L80B10)	50,000hrs
Dimming Control	Phase cut / 0-10V / DALI / Casambi
Warranty	5 years

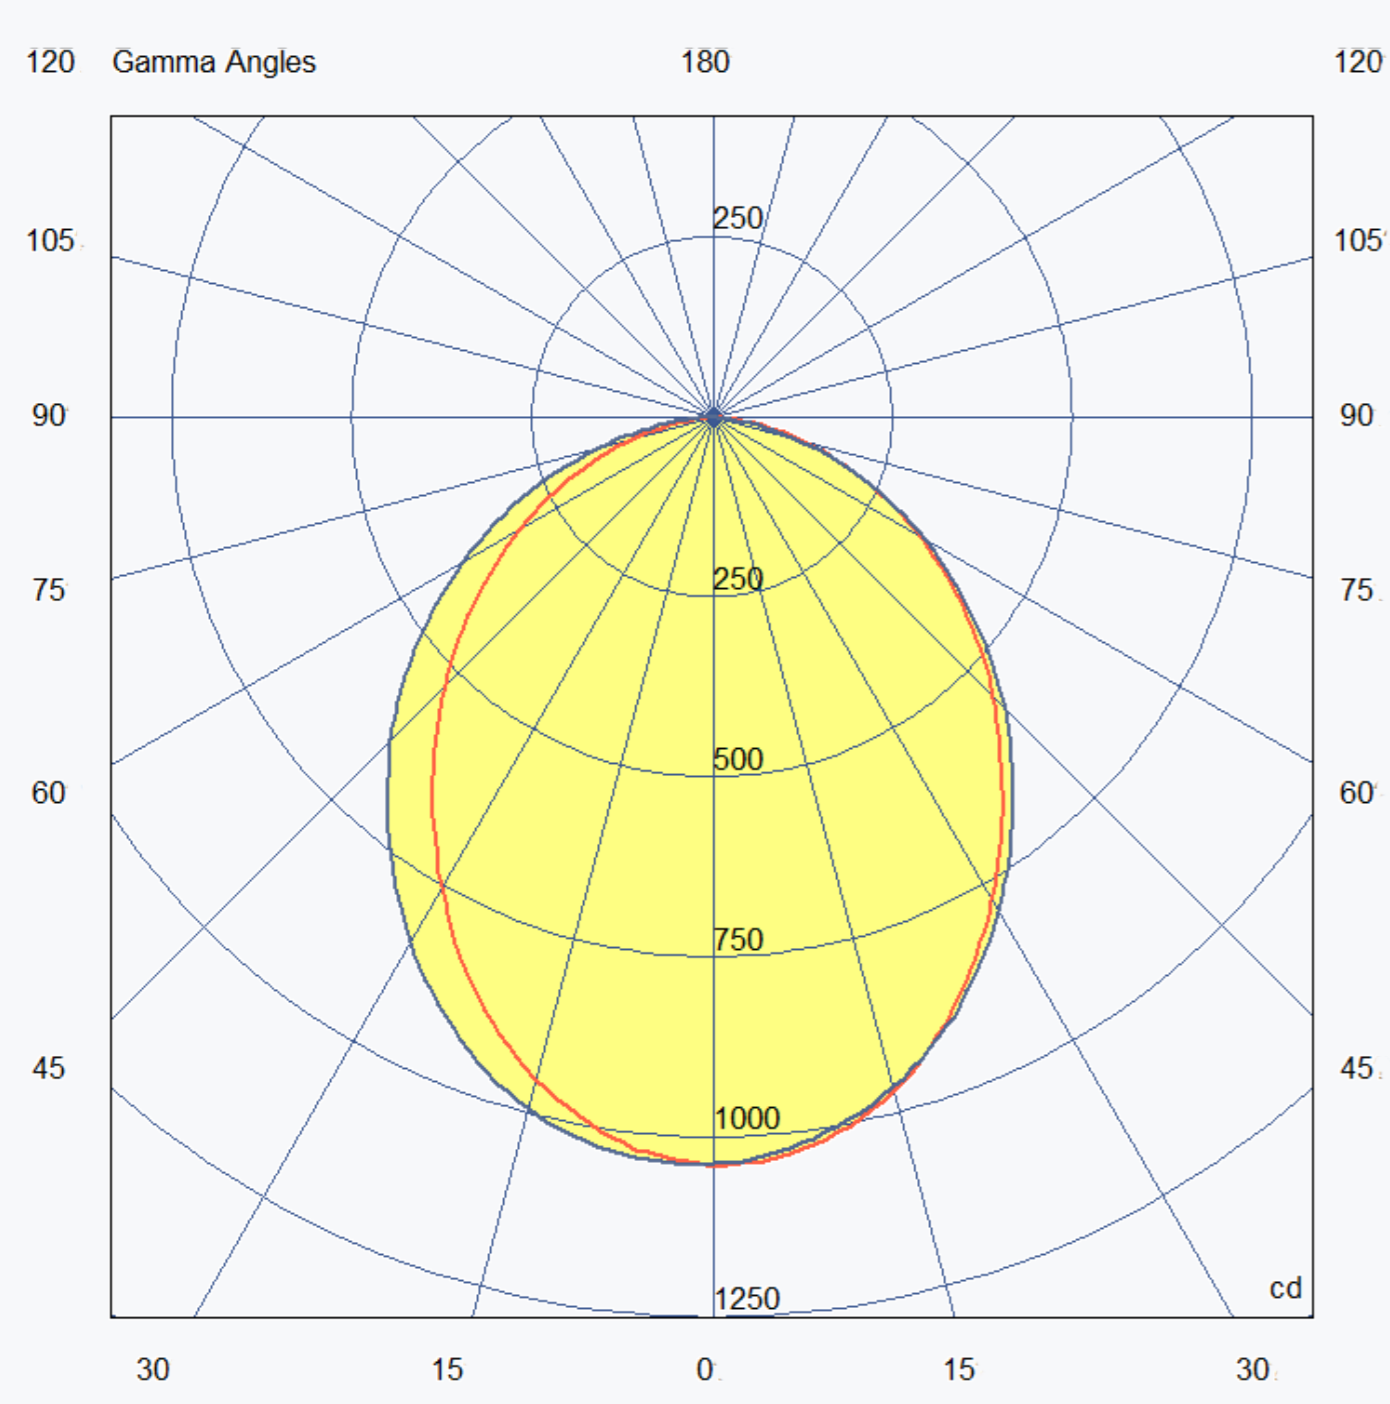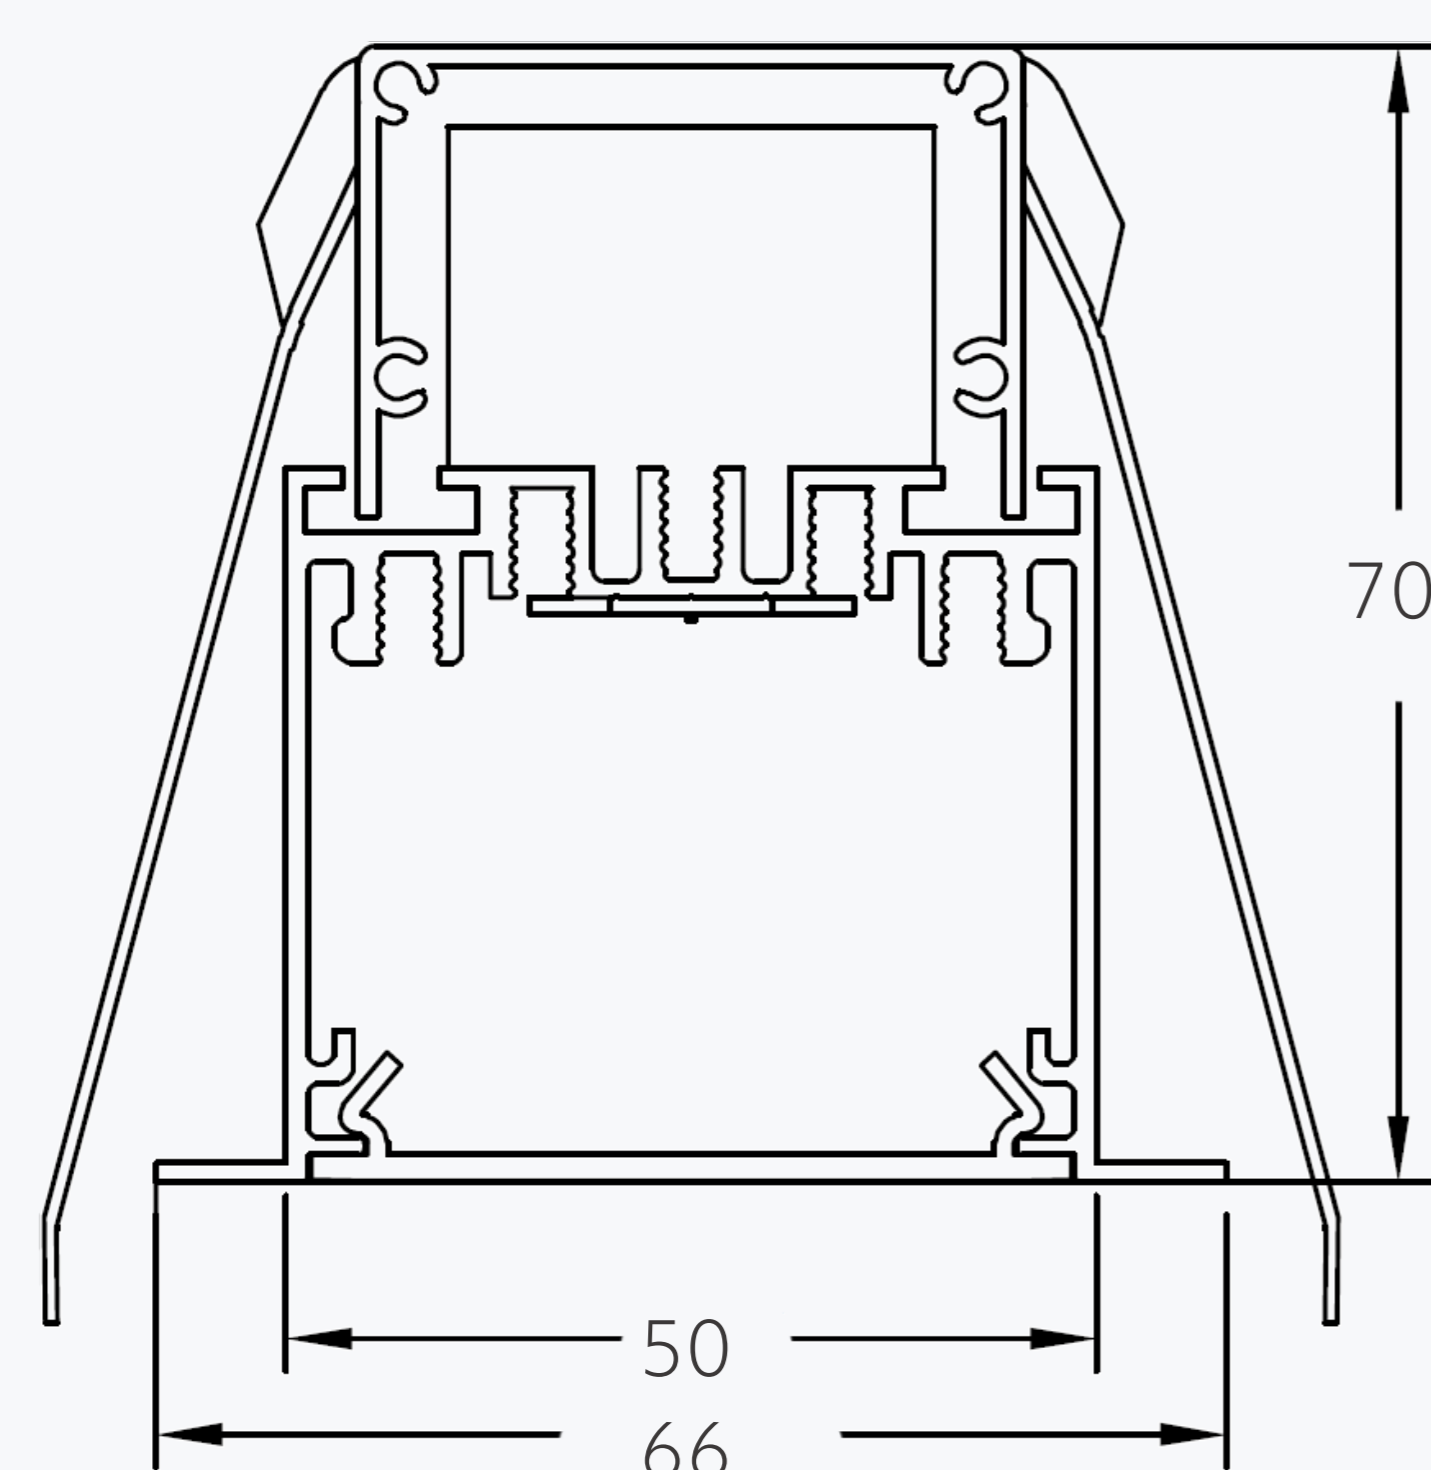

24 W/m 4000 K CRI80