

# KANTO

## 89 ADJ

### Canlight for Commercial & Retail Application

Kanto series offers versatile illumination as a surface-mounted, pendant, or recessed downlight. Available in a wide range of CCT with high CRI, it features multiple beam angles for precise lighting control. Compatible with phase-cut, 1-10V, and DALI dimming. Choose from white, black, or gold finishes to complement any interior aesthetic.





## LUMINAIRE SPECIFICATION

### Light Source Data

<b>System Power (W)</b>	8 / 10 / 12 / 15 @ 3000K
<b>Delivered Lumen (lm)</b>	712 / 813 / 939 / 1045 @ 3000K
<b>Efficacy (lm)</b>	Up to 75 @ 3000K
<b>LED Color Temperature (K)</b>	2700 / 3000 / 4000 / 5000
<b>Beam Angle</b>	15 ° / 24 ° / 36 ° / 50 °
<b>CRI</b>	90
<b>SDCM</b>	<3

### General Data

<b>Mounting</b>	Surface Mounted / Suspended / Recessed
<b>Dimension (mm)</b>	Ø89 x 150 (H)
<b>Cutout (mm)</b>	Ø64
<b>Housing Color</b>	White / Black
<b>Reflector Color</b>	Black
<b>IP Rating</b>	IP20
<b>Lifetime (L80B10)</b>	50,000hrs
<b>Dimming Control</b>	Phase cut / 0-10V / DALI / Casambi
<b>Warranty</b>	5 years

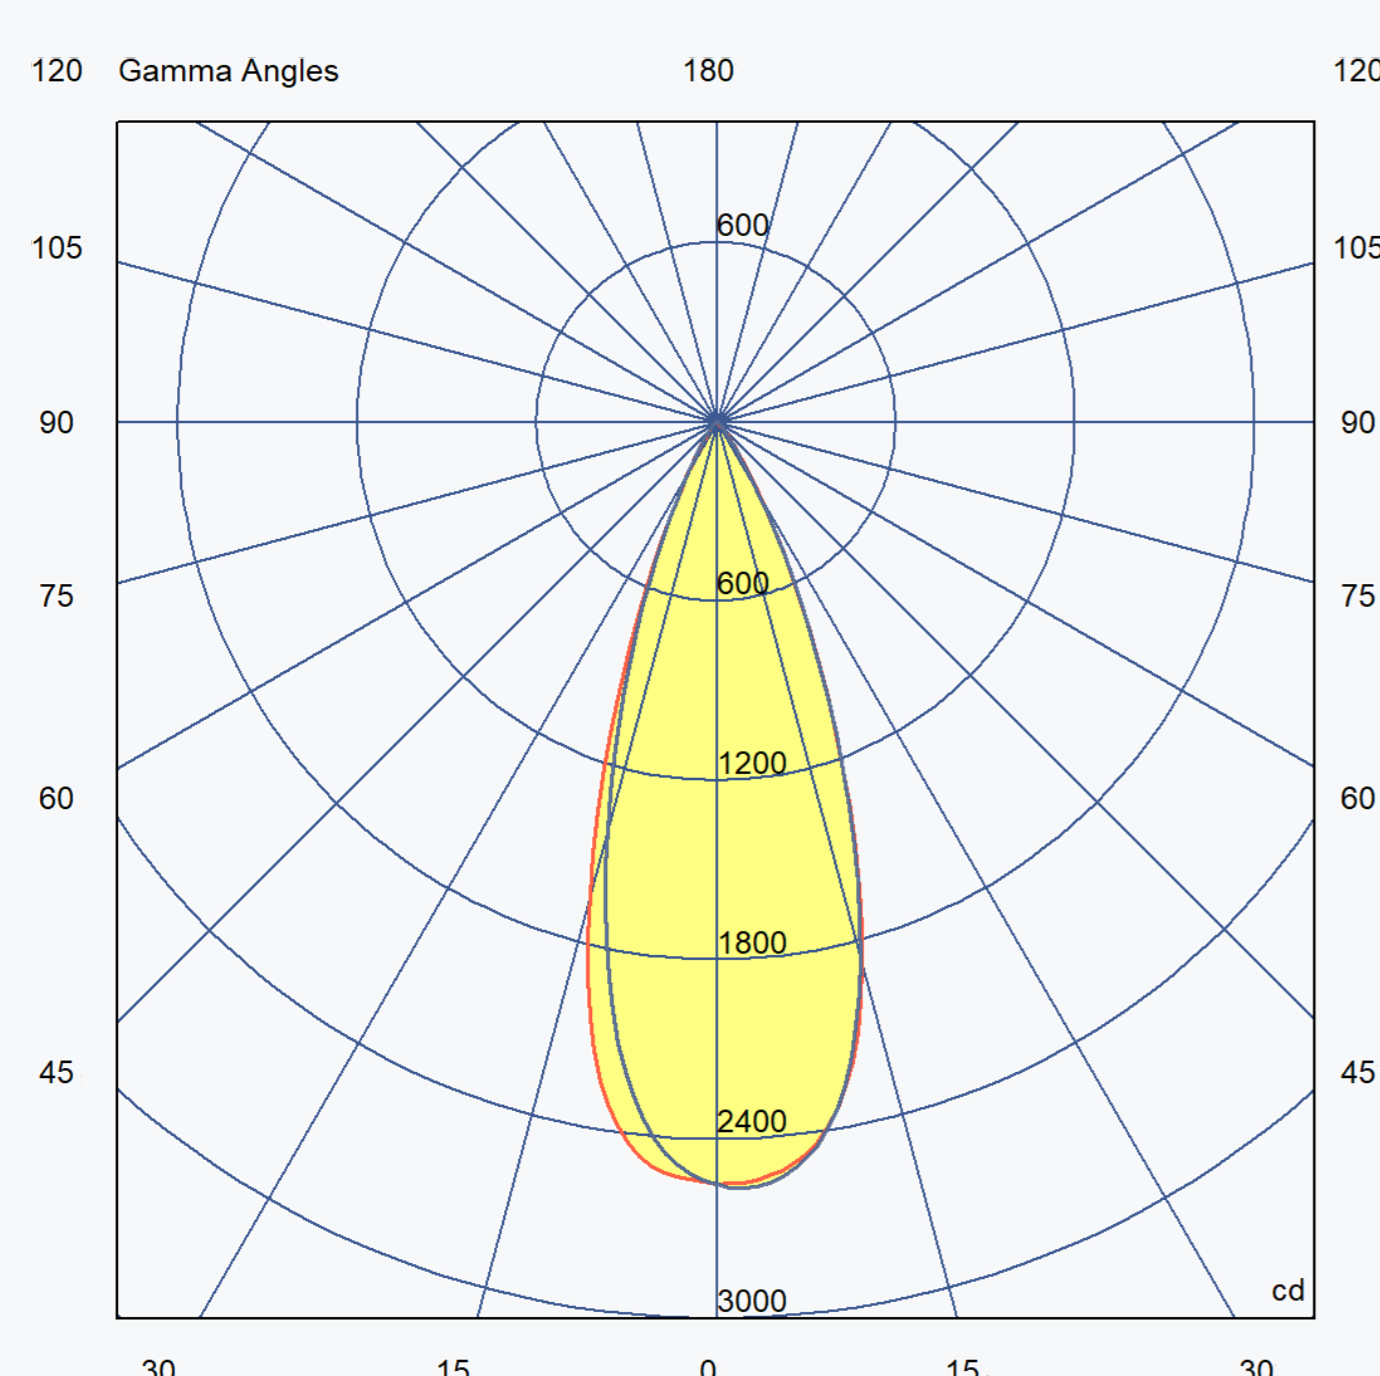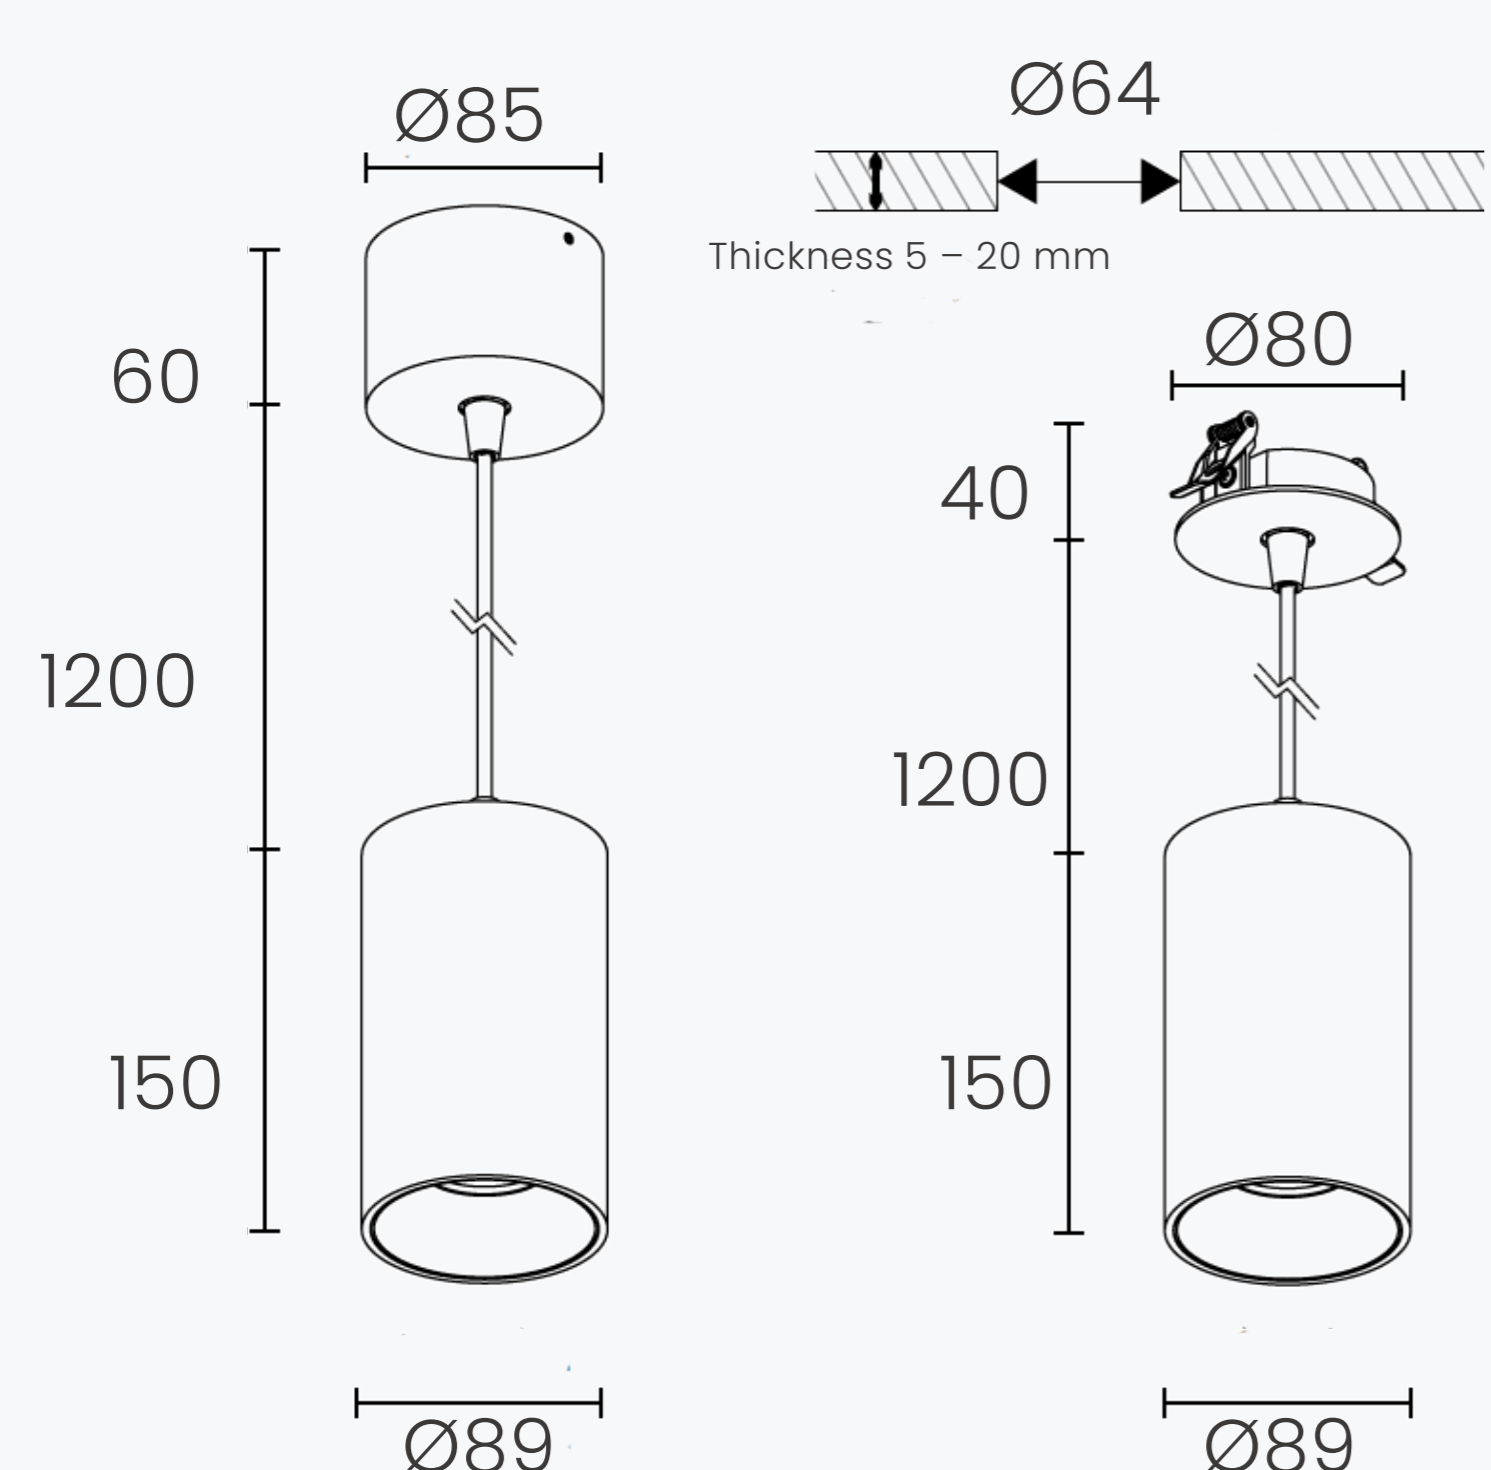

15W 3000K 36 °