


# KINO

## 0537

### Recessed Linear Downlight for Retail & Residential Application

Kino series offers low-glare, symmetrical illumination with a sleek, minimal trim. Crafted with high-grade materials and OSRAM LEDs, it features a dimmable driver and excellent heat dissipation for top-tier performance and durability.

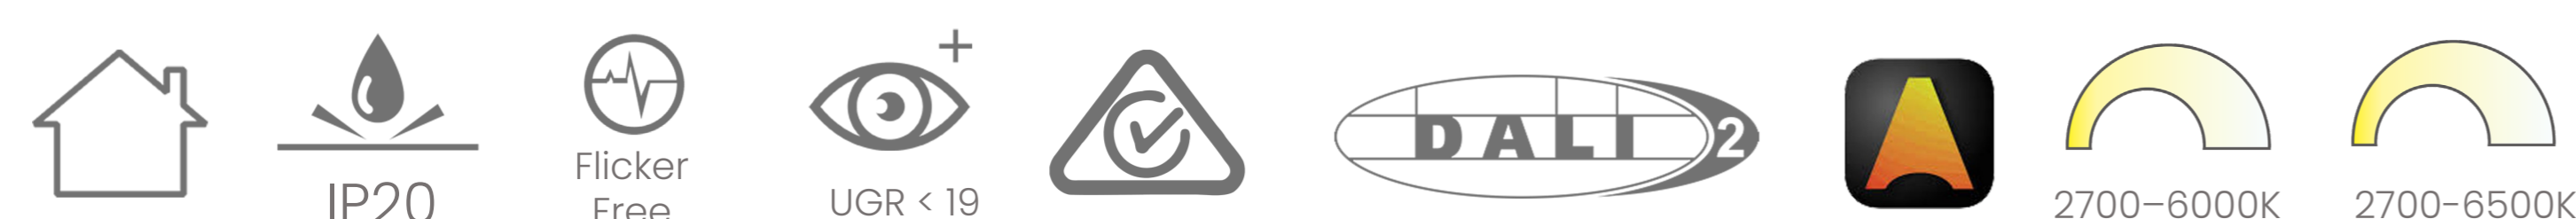

## LUMINAIRE SPECIFICATION

### Light Source Data

System Power (W)	10
Delivered Lumen (lm)	680
Efficacy (lm/W)	Up to 65
LED Color Temperature (K)	2700 / 3000 / 4000 / TW
Beam Angle	15 ° / 30 ° / 45 °
CRI	90
SDCM	<3

### General Data

Mounting	Recessed
Dimension (mm)	147 x 45 x 49 (H)
Cutout (mm)	104 x 37
Finish	White / Black
IP Rating	IP20
Lifetime (L80B10)	50,000hrs
Dimming Control	Phase cut / 0-10V / DALI / Casambi
Warranty	5 years

