


KINO

0633 SM

Recessed Linear Downlight for Retail & Residential Application

Kino series offers low-glare, symmetrical illumination with a sleek, minimal trim. Crafted with high-grade materials and OSRAM LEDs, it features a dimmable driver and excellent heat dissipation for top-tier performance and durability.

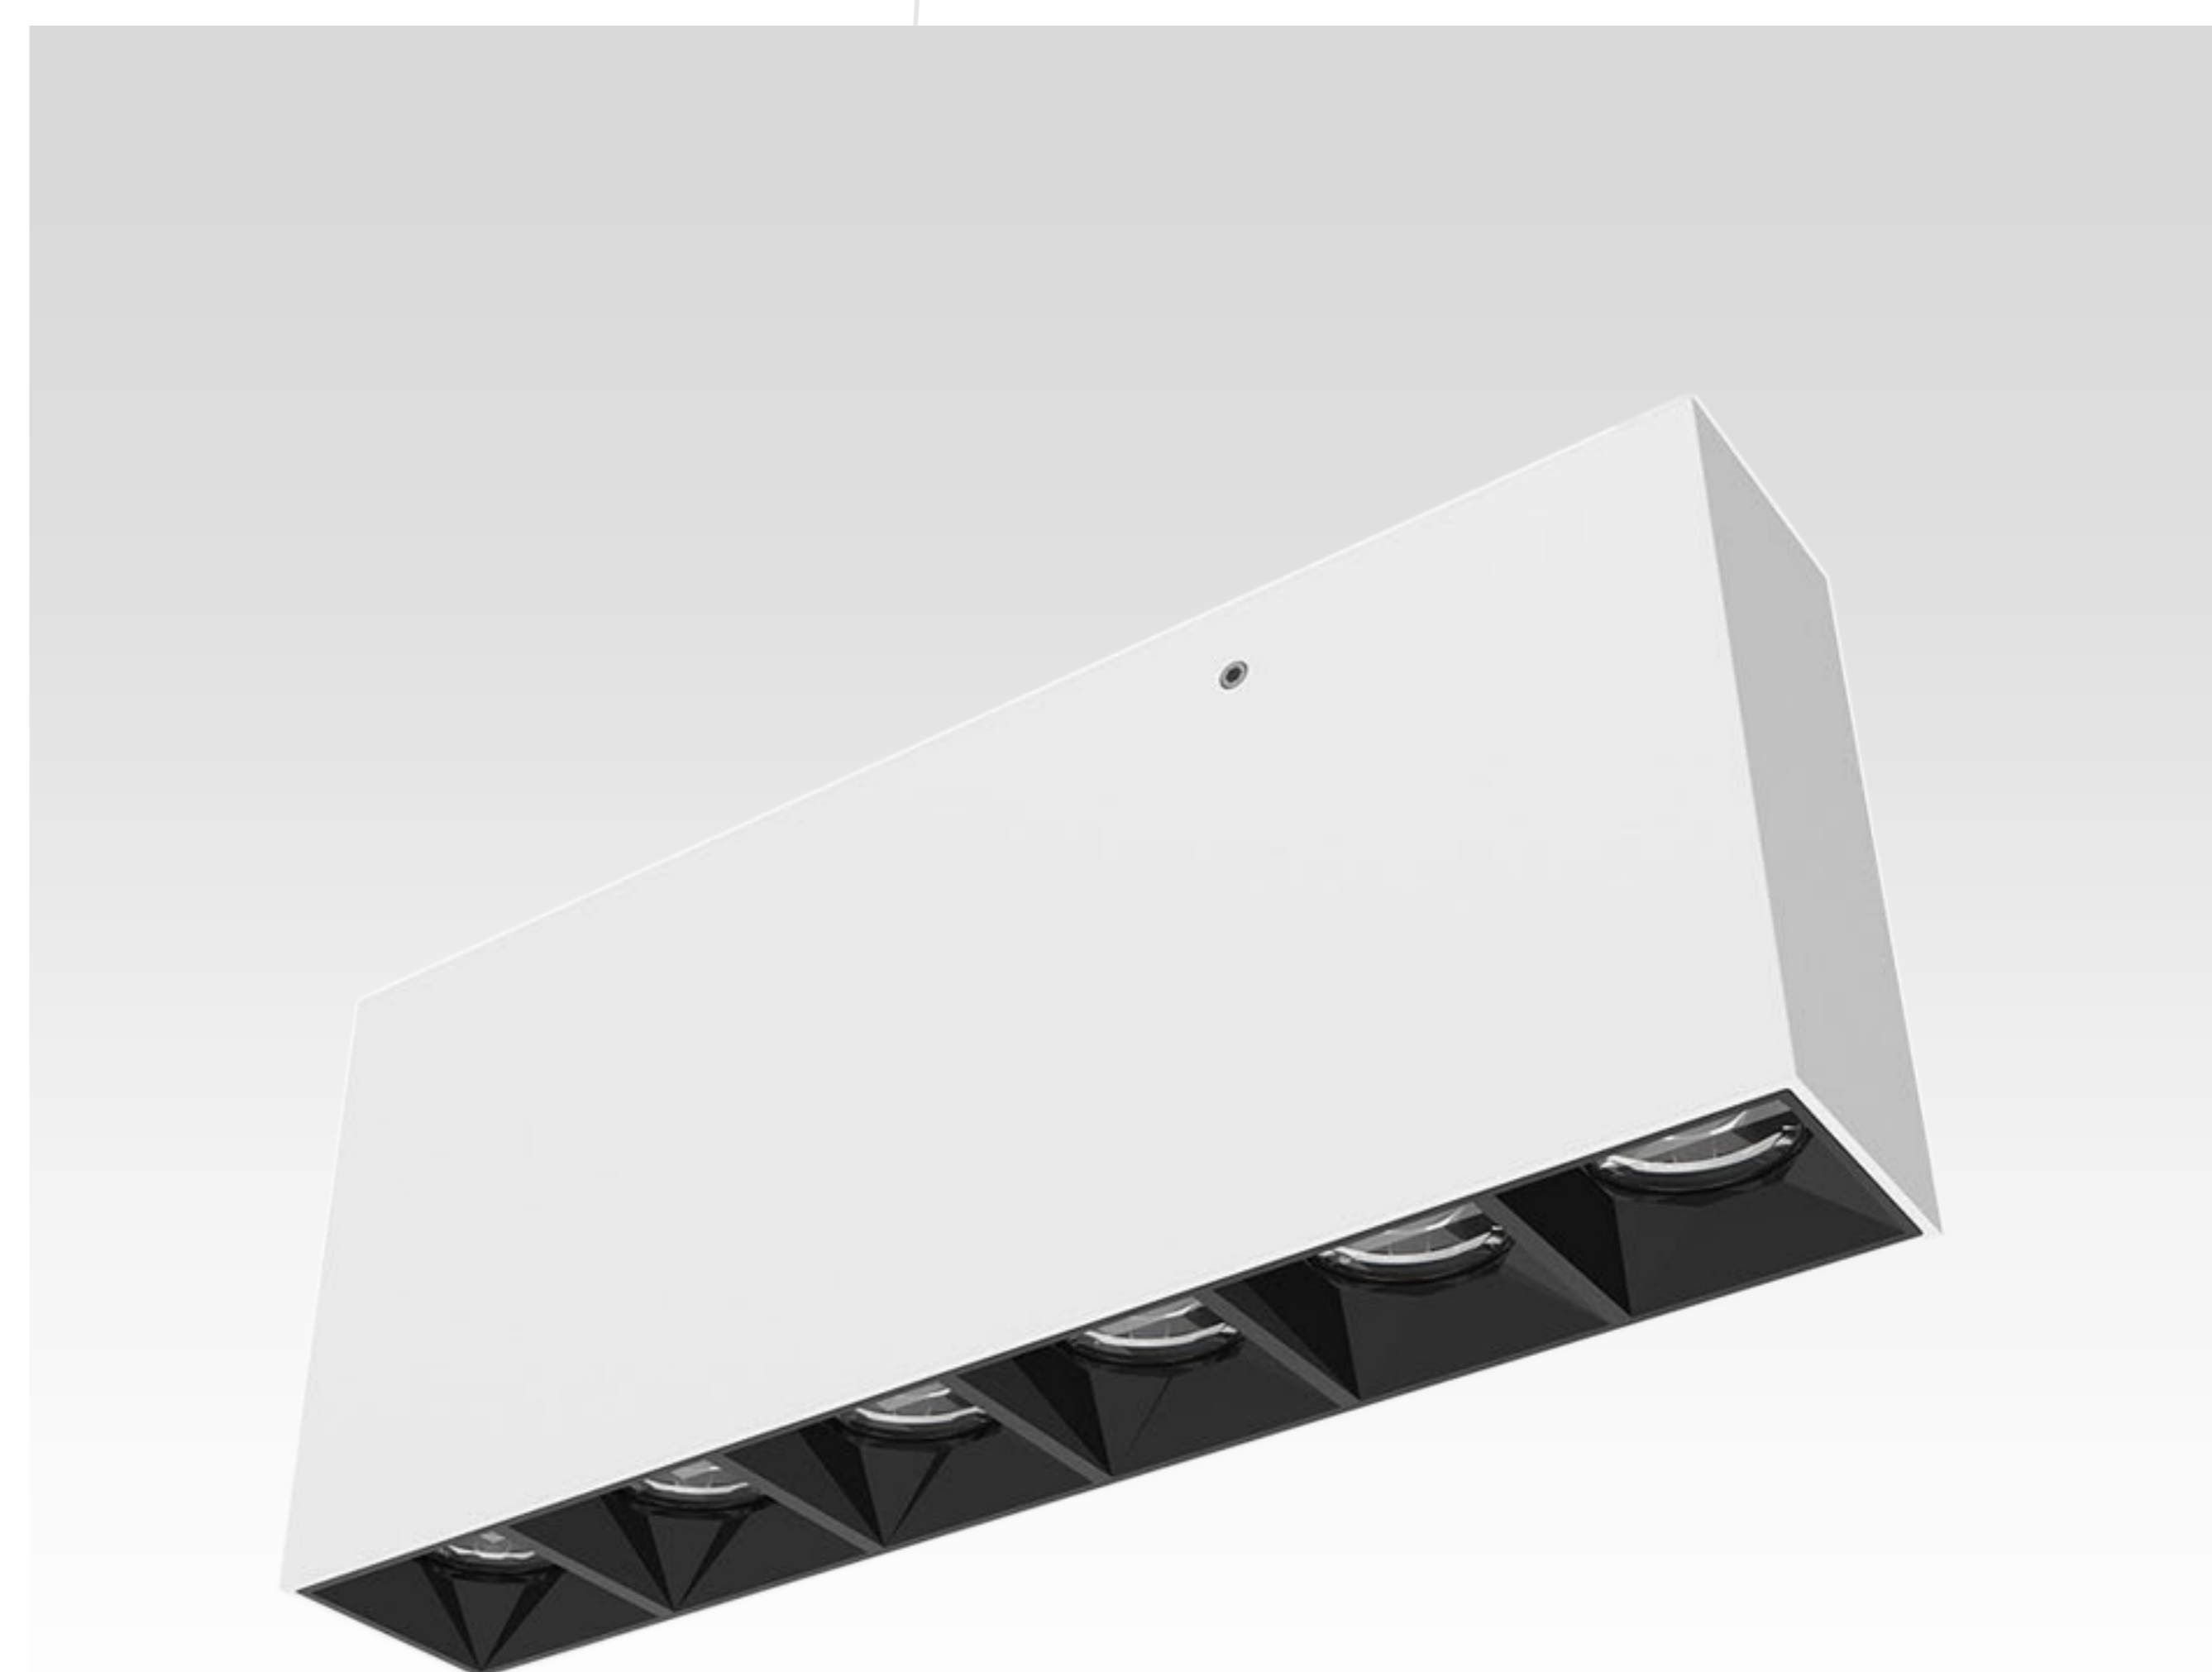

LUMINAIRE SPECIFICATION

Light Source Data

System Power (W)	12 / 20
Delivered Lumen (lm)	1138 / 1897
Efficacy (lm/W)	97
LED Color Temperature (K)	2700 / 3000 / 4000 / 5000
Beam Angle	24 ° / 36 ° / 45 °
CRI	90
SDCM	<3

General Data

Mounting	Surface Mounted
Dimension (mm)	183 x 33 x 80.5 (H)
Finish	White / Black
IP Rating	IP44
Lifetime (L80B10)	50,000hrs
Dimming Control	Phase cut / 0-10V / DALI / Casambi
Warranty	5 years

